


▼ Coaxial Solution:

Surge level: 8/20 μ s CM/DM 20KA

Application product:

Surge protection Device

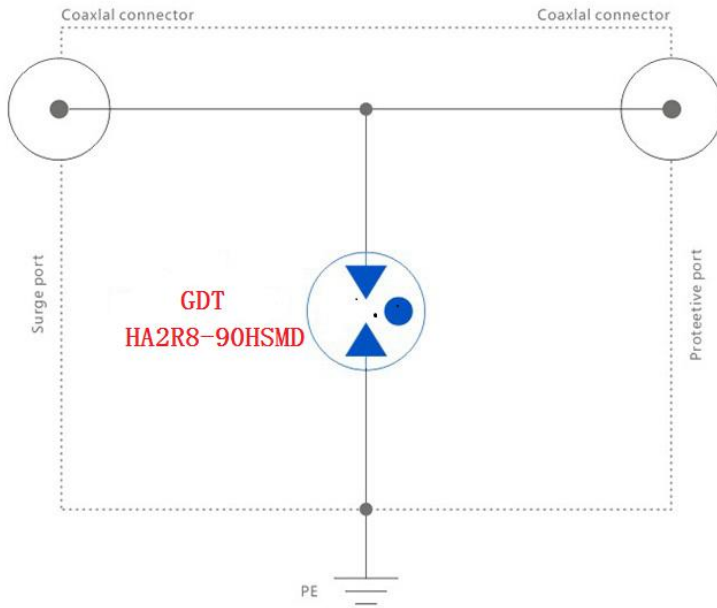

Specification.....

| Part Number | DC Spark-over Voltage @ 100V/S | Insulation Resistance | Impulse discharge current(8/20 μ s) | AC discharge current (50Hz,1s,10time s) | Capacitance (1MHz) | Size | UL file number |
|---------------------|--------------------------------|-----------------------|---|---|--------------------|--------------|----------------|
| GDT | V | G Ω | 10 Times | A | PF | mm | √ |
| HA2R8-90HSMD | 90V \pm 20% | >1 | 20KA | 20 | \leq 1 | Φ 8*6mm | E505240 |

We focus on development, production,distribution of GDT,TSS.MOV,TVS,ESD,PTC component,We have laboratories of EMC,aiming to provide total turnkey service of surge/ESD test and circuit PCB improvement.

sales@huaandz.com