
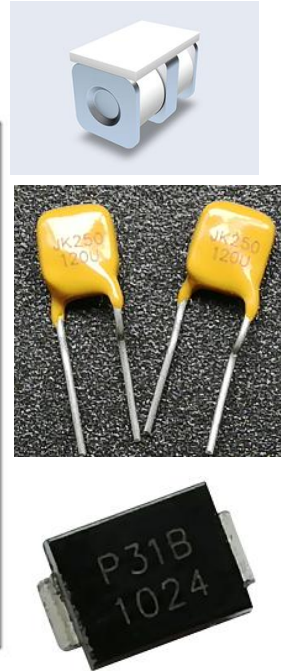


▼RJ11 Solution:

Surge level: 10/700μs CM/DM 6KV

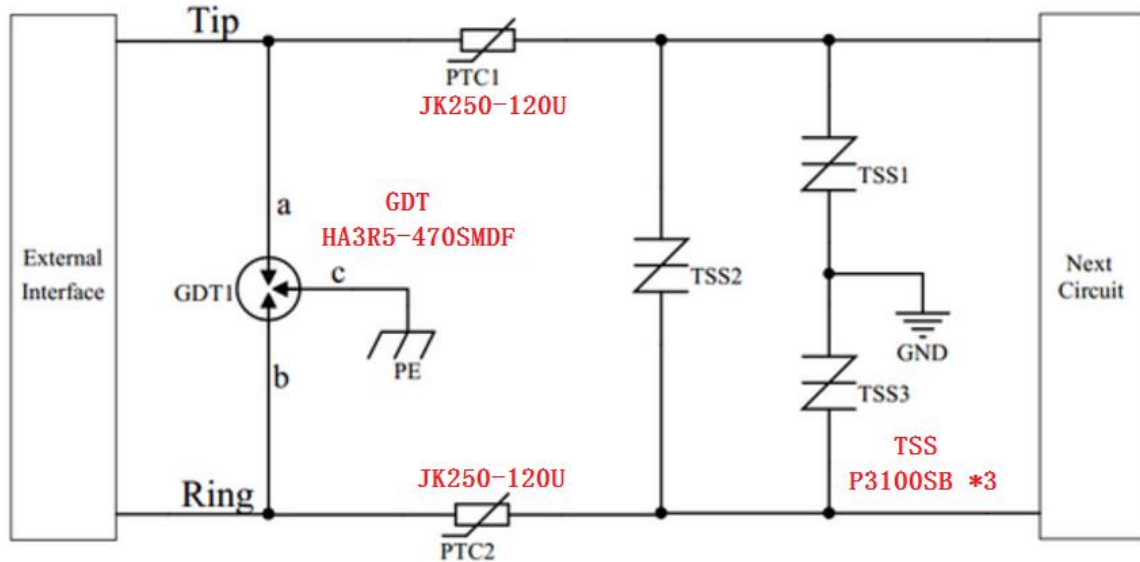

Specification.....

Part Number	DC Spark-over Voltage@ 100V/S	Insulation Resistance	Impulse discharge current(8/20μs)	AC discharge current (50Hz,1s,10times)	Capacitance (1MHz)	Size	UL file number
GDT	V	GΩ	10 Times	A	PF	mm	✓
HA3R5-470SMDF	470V± 20%	>1	5KA	5	≤1	Φ5*7.6	E505240

Part Number	V _{DRM} @I _{DRM} =5 μ A	V _s @100V/μs	I _h	I _s	I _r	V _T @I _T =2.2Amps	Capacitance @1MHz,2V bias	impulse withstand voltage	Package
TSS * 3	V _{min}	V _{max}	mA _{min}	mA _{max}	A _{max}	V _{max}	pF	10/700us	
P3100SB	275	350	150	800	2.2	4	45	4KV	SMB

Part Number	V _{max}	I _{max}	I _h	R _{max}	R _{min}	P _d
PTC	V	A	A	Ω	Ω	w
JK250-120U	250	10	0.12	11	6	0.8

We focus on development, production,distribution of GDT,TSS.MOV,TVS,ESD,PTC component.We have laboratories of EMC,aiming to provide total turnkey service of surge/ESD test and circuit PCB improvement.

