
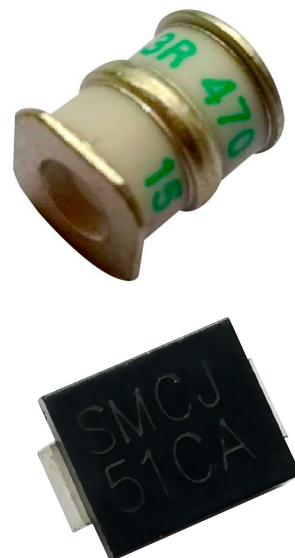


▼DC24V Solution:

Surge level: 1.2/50 μ S- 8/20 μ S- CM/DM 4KV-5KA

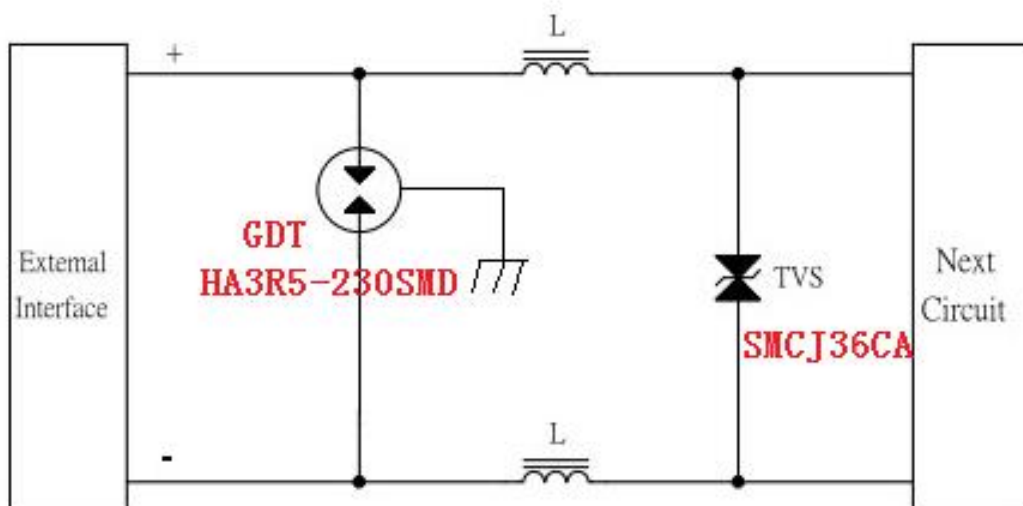

Specification.....

Part Number	DC Spark-over Voltage@ 100V/S	Insulation Resistance	Impulse discharge current(8/20 μ s)	AC discharge current (50Hz,1s,10times)	Capacitance (1MHz)	Size	UL file number
GDT	V	G Ω	10 Times	A	PF	mm	✓
HA3R5-230SMD	230V \pm 20%	>1	5KA	5	\leq 1	Φ 5*7.6	E505240

Part Number	Vbr	Ir	Vrwm	Ipp	Vc	Package
TVS	V	μ A	V	A	V	
SMCJ36CA	40.0- 44.2	1	36	25.9	58.1	SMC

We focus on development, production,distribution of GDT,TSS.MOV,TVS,ESD,PTC component.We have laboratories of EMC,aiming to provide total turnkey service of surge/ESD test and circuit PCB improvement.

sales@huaandz.com