


▼RS485 Solution:

Surge level: 10/700µs CM/DM 6KV

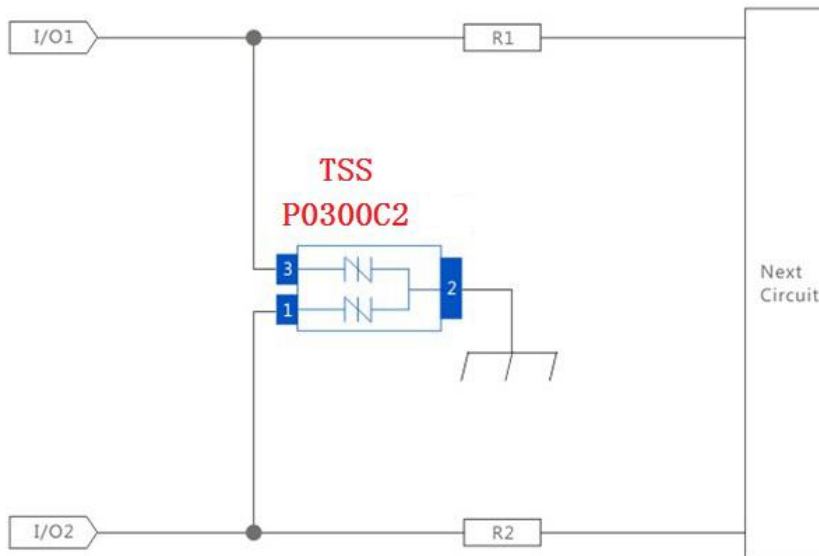

Specification.....

| Part Number | V _{DRM} @I _{DRM} =5 µ A | V _S @100V/ µs | I _H | I _S | I _T | V _T @I _T =2.2Am ps | Capacitance @1MHz,2V bias | impulse withstand voltage | Package |
|----------------|---|--------------------------------|-------------------|-------------------|------------------|--|---------------------------------|---------------------------------|---------|
| TSS | V _{min} | V _{max} | mA _{min} | mA _{max} | A _{max} | V _{max} | pF | 10/700us | |
| P0300C2 | 25 | 40 | 150 | 800 | 2.2 | 4 | 120 | 6KV | SMB |

We focus on development, production, distribution of GDT, TSS, MOV, TVS, ESD TVS, PTC component. We have laboratories of EMC, aiming to provide total turnkey service of surge/ESD test and circuit PCB improvement.

sales@huaandz.com