


▼ Video Solution:

Surge level: 1.2/50µs-8/20µs CM 2KV-72A AHD

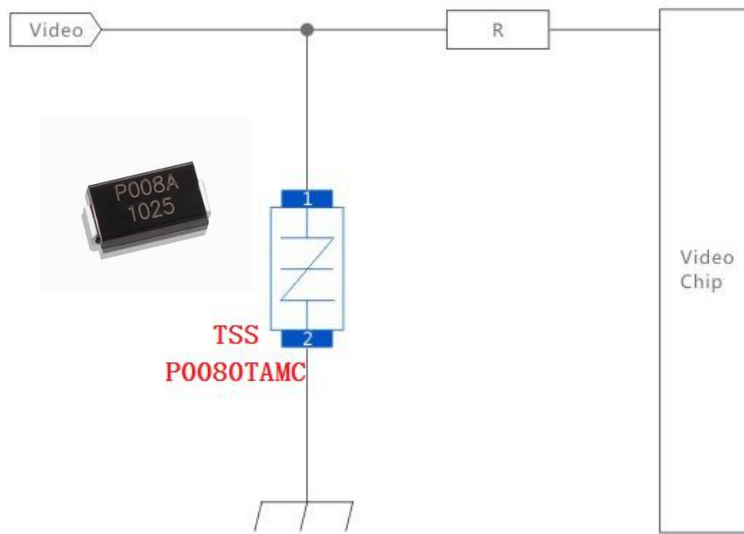

Specification.....

| Part Number | V _{DRM} @I _{DRM} =5 µ A | V _S @100 V/µs | I _H | I _S | I _T | V _T @I _T =2.2Am ps | Capacitance @1MHz,2V bias | Package |
|------------------|---|--------------------------------|-------------------|-------------------|------------------|--|------------------------------|---------|
| TSS | V _{min} | V _{max} | mA _{min} | mA _{max} | A _{max} | V _{max} | pF | |
| P0080TAMC | 6 | 25 | 10 | 800 | 2.2 | 4 | 10 | SMA |

We focus on development, production,distribution of GDT,TSS.MOV,TVS,ESD TVS,PTC component.We have laboratories of EMC,aiming to provide total turnkey service of surge/ESD test and circuit PCB improvement.

sales@huaandz.com