

1-Line Uni-directional TVS Diode Array

APPLICATION

- ◆ Mobile Phones and Accessories
- ◆ Battery Protection
- ◆ Power Supply Protection
- ◆ Hand Held Portable Applications
- ◆ Peripherals




IEC COMPATIBILITY

Package: SOD-323

- ◆ IEC61000-4-2 (ESD) ±30kV (air), ±30kV (contact)
- ◆ IEC61000-4-5 (Lightning) 120A (8/20µs)

FEATURES

- ◆ Small SOD-323 package
- ◆ Protects one data or power line
- ◆ Operating Voltage: 5V
- ◆ High peak pulse current capability
- ◆ Ultra low clamping voltage

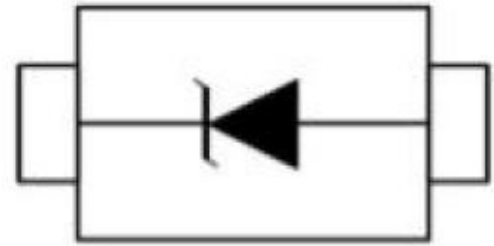


Electrical Characteristics

Part Number	VRWM	VBR	IR (max)	Co	Vc	Vc	Ipp@8	Ppp	Delivery Time
	V	V	(µA)	Max value	@1A Max	@ 120A Max	/20us	8/20us	Days
				pF	V	V	A max	W	
HAP0511D3	5	6	1	450	9.5	15	120	1800	7days

1-Line Uni-directional TVS Diode Array

Package Mechanical Data

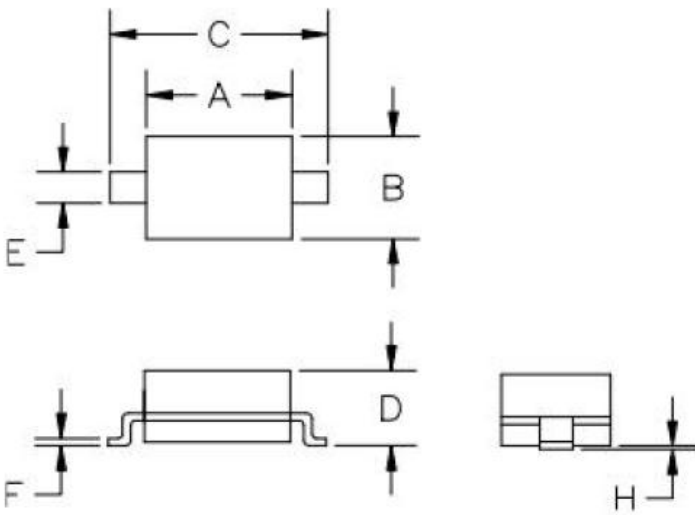

SYM	DIMENSIONS			
	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.50	1.80	0.060	0.071
B	1.20	1.40	0.045	0.054
C	2.30	2.70	0.090	0.107
D	-	1.10	-	0.043
E	0.30	0.40	0.012	0.016
F	0.10	0.25	0.004	0.010
H	-	0.10	-	0.004

Ordering Information

Part Number	Qty per Reel	Reel Size	Package	Delivery Time
HAP0511D3	3000pcs	7inch	SOD-323	7days

Specifications are subject to change without notice

2

Tel: +86-755-27465585

HUAAN LIMITED

www.huaandz.com

Email: sales@huaandz.com