

Metal Oxide Varistors (MOV)

Features


- Wide operating voltage (V1mA) range from 18V to 1800V
- Fast responding to transient over-voltage
- Large absorbing transient energy capability
- Low clamping ratio and no follow-on current
- Meets MSL level 1, per J-STD-020
- UL 1449 4th SPD Type 5
- Operating Temperature: -40°C ~ +125°C
- Storage Temperature: -40°C ~ +150°C
- Safety certification



Applications

- Transistor, diode, IC, thyristor or triac semiconductor protection
- Surge protection in consumer electronics
- Surge protection in industrial electronics
- Surge protection in electronic home appliances, gas and petroleum appliances
- Relay and electromagnetic valve surge absorption

Description of Part Number

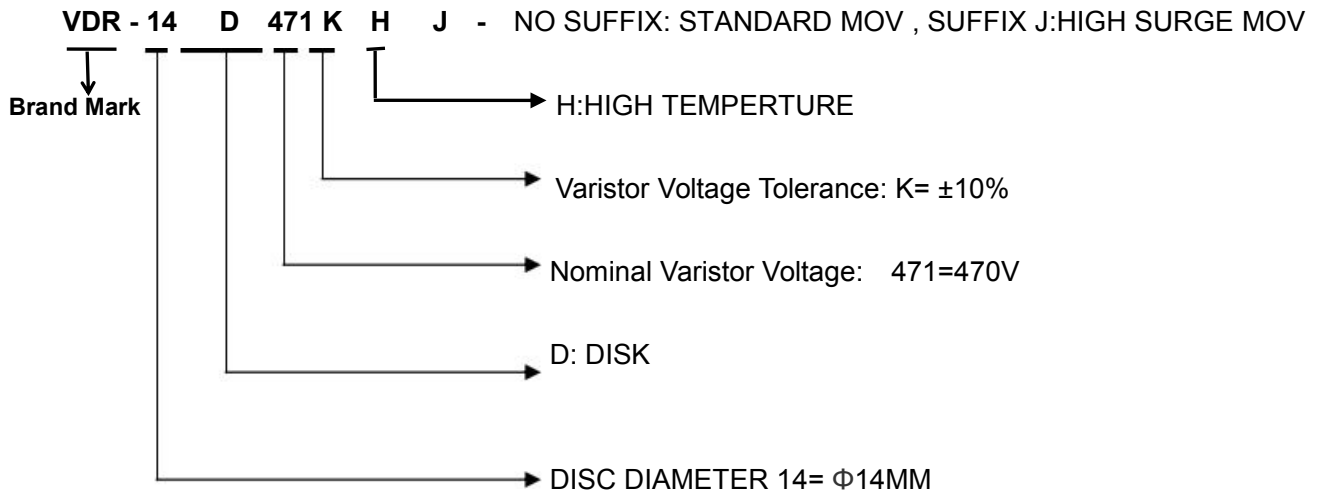

Delivery Time

Standard MOV	Delivery Time	High Surge MOV	Delivery Time
VDR-14D180LH~VDR-14D182KH	15days	VDR-14D180LHJ~VDR-14D182KHJ	15days

Electrical Characteristics

Part Number	Maximum Allowable Voltage		Varistor Voltage $V_{1mA}(V)$	Maximum Clamping Voltage $V_c(V)$ AT 25A	Max Surge Current 8/20 μ s I_{max} Standard	Maximum Energy (10/1000 μ s) (J) Standard	Typical Capacitance (Reference) 1KHz(pf)	Safety Certification	
	$V_{AC}(V)$	$V_{DC}(V)$						UL / CUL	VDE
VDR-14D180LH	11	14	18(15.3~20.7)	36	1000A	4	11000	-	-
VDR-14D220KH	14	18	22(19.8~24.2)	43	1000A	5	9100	-	-
VDR-14D270KH	17	22	27(24.3~29.7)	53	1000A	6	7400	-	√
VDR-14D330KH	20	26	33(29.7~36.5)	66	1000A	7.5	6100	-	√
VDR-14D390KH	25	31	39(35.1~42.9)	77	1000A	8.6	5100	-	√
VDR-14D470KH	30	38	47(42.3~51.7)	93	1000A	10	4300	-	√
VDR-14D560KH	35	45	56(50.4~61.6)	100	1000A	11	3600	-	√
VDR-14D680KH	40	56	68(61.2~74.8)	135	1000A	14	2900	-	√
VDR-14D820KH	50	65	82(73.8~90.2)	135	4500A	22	2400	√	√
VDR-14D101KH	60	85	100(90~110)	165	4500A	28	2000	√	√
VDR-14D121KH	75	100	120(108~132)	200	4500A	32	1700	√	√
VDR-14D151KH	95	125	150(135~165)	250	4500A	40	1300	√	√
VDR-14D181KH	115	150	180(162~198)	300	4500A	50	1100	√	√
VDR-14D201KH	130	170	200(180~220)	340	4500A	57	1000	√	√
VDR-14D221KH	140	180	220(198~242)	360	4500A	60	900	√	√
VDR-14D241KH	150	200	240(216~264)	395	4500A	63	830	√	√
VDR-14D271KH	175	225	270(243~297)	455	4500A	70	740	√	√
VDR-14D301KH	190	250	300(270~330)	500	4500A	77	670	√	√
VDR-14D331KH	210	275	330(297~363)	550	4500A	85	610	√	√
VDR-14D361KH	230	300	360(324~396)	595	4500A	93	560	√	√
VDR-14D391KH	250	320	390(351~429)	650	4500A	100	510	√	√
VDR-14D431KH	275	350	430(387~473)	710	4500A	115	460	√	√
VDR-14D471KH	300	385	470(423~517)	775	4500A	125	430	√	√
VDR-14D511KH	320	415	510(459~561)	845	4500A	125	390	√	√
VDR-14D561KH	350	460	560(504~616)	925	4500A	125	360	√	√
VDR-14D621KH	385	505	620(558~682)	1025	4500A	125	320	√	√
VDR-14D681KH	420	560	680(612~748)	1120	4500A	130	290	√	√
VDR-14D751KH	460	615	750(675~825)	1240	4500A	143	270	√	√
VDR-14D781KH	485	640	780(702~858)	1290	4500A	148	260	√	-
VDR-14D821KH	510	670	820(738~902)	1355	4500A	157	240	√	-
VDR-14D911KH	550	745	910(819~1001)	1500	4500A	175	220	√	-
VDR-14D102KH	625	825	1000(900~1100)	1650	4500A	190	200	√	-
VDR-14D112KH	680	895	1100(990~1210)	1815	4500A	213	180	√	-
VDR-14D122KH	750	990	1200(1080~1320)	1980	4500A	213	150	-	-
VDR-14D182KH	1000	1465	1800(1620~1980)	2970	4500A	250	130	-	-

Electrical Characteristics

Part Number	Maximum Allowable Voltage		Varistor Voltage V _{1mA} (V)	Maximum Clamping Voltage V _c (V) AT 25A	Max Surge Current 8/20μs I _{max} High Surge	Maximum Energy (10/1000μs) (J) High Surge	Typical Capacitance (Reference) 1KHz(pf)	Safety Certification	
	V _{AC} (V)	V _{DC} (V)						UL / CUL	VDE
VDR-14D180KHJ	11	14	18(15.3~20.7)	36	2000A	7	11100	-	-
VDR-14D220KHJ	14	18	22(19.8~24.2)	43	2000A	8	9100	-	-
VDR-14D270KHJ	17	22	27(24.3~29.7)	53	2000A	10	7400	-	-
VDR-14D330KHJ	20	26	33(29.7~36.5)	66	2000A	12	6100	-	-
VDR-14D390KHJ	25	31	39(35.1~42.9)	77	2000A	13	5100	-	-
VDR-14D470KHJ	30	38	47(42.3~51.7)	93	2000A	17	4300	-	-
VDR-14D560KHJ	35	45	56(50.4~61.6)	100	2000A	20	3600	-	-
VDR-14D680KHJ	40	56	68(61.2~74.8)	135	2000A	24	2900	-	-
VDR-14D820KHJ	50	65	82(73.8~90.2)	135	6000A	27	2400	-	-
VDR-14D101KHJ	60	85	100(90~110)	165	6000A	33	2000	-	-
VDR-14D121KHJ	75	100	120(108~132)	200	6000A	40	1700	-	-
VDR-14D151KHJ	95	125	150(135~165)	250	6000A	53	1300	-	-
VDR-14D181KHJ	115	150	180(162~198)	300	6000A	60	1100	-	-
VDR-14D201KHJ	130	170	200(180~220)	340	6000A	70	1000	-	-
VDR-14D221KHJ	140	180	220(198~242)	360	6000A	78	900	-	-
VDR-14D241KHJ	150	200	240(216~264)	395	6000A	84	830	-	-
VDR-14D271KHJ	175	225	270(243~297)	455	6000A	99	740	-	-
VDR-14D301KHJ	190	250	300(270~330)	500	6000A	108	670	-	-
VDR-14D331KHJ	210	275	330(297~363)	550	6000A	115	610	-	-
VDR-14D361KHJ	230	300	360(324~396)	595	6000A	130	560	-	-
VDR-14D391KHJ	250	320	390(351~429)	650	6000A	140	510	-	-
VDR-14D431KHJ	275	350	430(387~473)	710	6000A	155	460	-	-
VDR-14D471KHJ	300	385	470(423~517)	775	6000A	175	430	-	-
VDR-14D511KHJ	320	415	510(459~561)	845	6000A	180	390	-	-
VDR-14D561KHJ	350	460	560(504~616)	925	6000A	185	360	-	-
VDR-14D621KHJ	385	505	620(558~682)	1025	6000A	190	320	-	-
VDR-14D681KHJ	420	560	680(612~748)	1120	6000A	200	290	-	-
VDR-14D751KHJ	460	615	750(675~825)	1240	6000A	210	270	-	-
VDR-14D781KHJ	485	640	780(702~858)	1290	6000A	220	260	-	-
VDR-14D821KHJ	510	670	820(738~902)	1355	6000A	235	240	-	-
VDR-14D911KHJ	550	745	910(819~1001)	1500	6000A	255	220	-	-
VDR-14D102KHJ	625	825	1000(900~1100)	1650	6000A	280	200	-	-
VDR-14D112KHJ	680	895	1100(990~1210)	1815	6000A	310	180	-	-
VDR-14D122KHJ	750	990	1200(1080~1320)	1980	6000A	310	150	-	-
VDR-14D182KHJ	1000	1465	1800(1620~1980)	2970	6000A	335	130	-	-

Dimension(mm)

Straight Lead

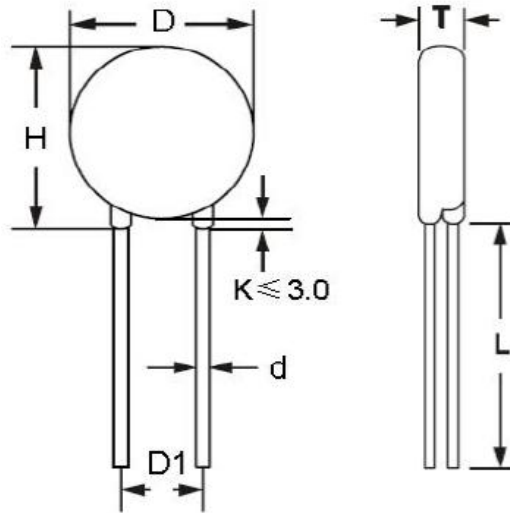


TABLE1

TABLE2

Symbol	Dimensions	Part number	T(±1.0mm)	Part number	T(±1.0mm)
H(Max)	22.0mm	VDR-14D180LH	3.24mm	VDR-14D331KH	3.32mm
L(Min)	22.0mm	VDR-14D220KH	3.32mm	VDR-14D361KH	3.50mm
D(Max)	16.5mm	VDR-14D270KH	3.46mm	VDR-14D391KH	3.68mm
D1(±0.8)	7.5mm	VDR-14D330KH	3.68mm	VDR-14D431KH	3.93mm
T	TABLE2	VDR-14D390KH	3.44mm	VDR-14D471KH	4.17mm
d(±0.05)	0.8mm	VDR-14D470KH	3.63mm	VDR-14D511KH	4.42mm
		VDR-14D560KH	3.88mm	VDR-14D561KH	4.72mm
		VDR-14D680KH	4.17mm	VDR-14D621KH	5.09mm
		VDR-14D820KH	3.38mm	VDR-14D681KH	5.46mm
		VDR-14D101KH	3.25mm	VDR-14D751KH	5.53mm
		VDR-14D121KH	3.40mm	VDR-14D781KH	5.59mm
		VDR-14D151KH	3.12mm	VDR-14D821KH	5.81mm
		VDR-14D181KH	3.26mm	VDR-14D911KH	5.85mm
		VDR-14D201KH	3.36mm	VDR-14D102KH	6.30mm
		VDR-14D221KH	3.40mm	VDR-14D112KH	6.80mm
		VDR-14D241KH	3.55mm	VDR-14D122KH	8.30mm
		VDR-14D271KH	3.60mm	VDR-14D182KH	10.30mm
		VDR-14D301KH	3.64mm		

Packing Information

Part Number	Quantity	Packaging Option	Packaging Specification
VDR-14DxxxKH	500PCS	Plastic bag	Bulk Pack

Notice for use

To avoid damage to other equipment due to fire or deterioration caused by varistor, please refer to and observe the following principles:

1) When a high current or high voltage flows into the varistor, the varistor itself may be damaged, heated, smoke, catch fire and burst.

To avoid this, fuses or circuit breakers can be installed at both ends of the varistor or power supply;

The fuses of the following specifications are for reference only:

	Diameter 05D	07D	10D	14D	20D
Rated current of fuse	1-2A	2-3A	3-5A	3-10A	5-15A

2) Do not allow the current and energy flowing into the varistor to exceed its rated value.

3) The marked VDR product brand names and marks are all patent applications of the company.

Customers who use or sell VDR products that are not specifically designated for such applications are at their own risk.

4) All VDR products, product specifications and data are subject to change without notice, please improve. For any data sheet Or any other data sheet. Any errors included. Inaccurate or incomplete shall not be liable.

5) Regarding the suitability of products for specific applications. It is the customer's responsibility to confirm that products with the characteristics described in the product specifications application. The data provided in the parameter data sheets and / or specifications may vary for different applications and performance may vary over time Variety. All operating parameters, including typical parameters, must be provided by the customer 's technical experts. Product specifications will not expand or Modify the VDR procurement terms and conditions in other ways, including but not limited to the guarantees described therein.

6) Do not place flammable substances near the varistor.

7) The varistor can only emit a small amount of heat energy, so it is not suitable for use in equipment that often generates sudden heat.

In addition, the higher the working environment of the varistor, the smaller the proportion of heat dissipated.

Varistors can only dissipate a small amount of heat energy, so they are not suitable for use in equipment that often generates sudden heat.

If a large amount of heat acts on the varistor in an instant, it is possible that the heat energy cannot be dissipated within the pulse time And the varistor is damaged.

8) When welding, please be careful not to melt the welding points of the varistor and the resin coating.

Material category policy

All products of VDR hereby certify that RoHS-compliant products are in accordance with the definitions and Restrictions on June 8, 2011 regarding restrictions on the use of certain hazardous substances (Reach) in electrical and electronic equipment. We confirm All VDR products comply with the IEC 61249-2-21 JEDEC JS709A standard.